



**RAIL ELECTRONICS CZ s.r.o.**

U Nemocnice 1428, 363 01 OSTROV, CZ

## Fast charging switchboard RNS 32


### Technical data



worked out:	Approved:	Date: 3.5. 2019	Number of pages: 3
Stanislav Koucký	Karel Pintr	Document number:	
Signature:	Signature:	T62401-en Technical data RNS32.docx	

Input voltage	3× 400 VAC
Input fuses	250A
Output voltage	3× 400 VAC
Output current	250A
Cover	IP44
Charging connector	KRD 20
Working temperature	-25°C - +40°C
Dimension (box)	1200 × 1900 × 600 mm
Masse	300 kg

**Charging connector KRD 20:**

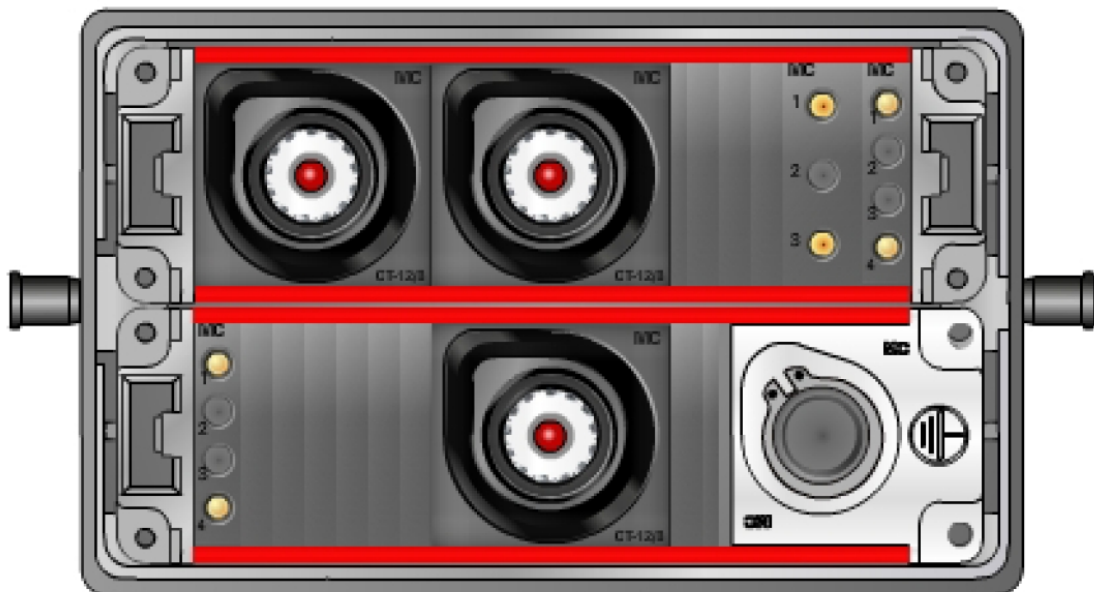

Dimensional drawing with cable compartment:

